

The CanFestival CANOpen stack manual.



# CanFestival v3.0 Manual

1 -	Introduction . . . . .	3
1.1)	The CanFestival project . . . . .	3
1.2)	What is CANopen . . . . .	3
2 -	CanFestival Features . . . . .	4
2.1)	Tools . . . . .	4
2.2)	Standard conformance . . . . .	4
3 -	How to start . . . . .	5
3.1)	Host requirements . . . . .	5
3.2)	How to get CanFestival . . . . .	6
4 -	Understanding Canfestival . . . . .	6
4.1)	CanFestival Project tree layout . . . . .	6
4.2)	Implement CanFestival in your application . . . . .	7
4.3)	CanFestival CAN interfaces . . . . .	8
4.4)	CanFestival events scheduling . . . . .	9
5 -	Linux Target . . . . .	9
5.1)	Linux Compilation and installation . . . . .	10
5.2)	Testing your CanFestival installation . . . . .	11
6 -	Windows Targets . . . . .	12
6.1)	Object Dictionary Editor GUI installation. . . . .	12
6.2)	CYGWIN . . . . .	12
6.3)	Visual Studio C++ . . . . .	14
6.4)	MSYS . . . . .	14
7 -	Motorola HCS12 . . . . .	16
7.1)	Running a HCS12 node . . . . .	17
8 -	Example and test program: . . . . .	18
8.1)	TestMasterSlave . . . . .	18
8.2)	gene_SYNC_HCS12 : . . . . .	19
8.3)	kerneltest : . . . . .	19
8.4)	TestMasterMicroMod . . . . .	20
9 -	Developing a new node . . . . .	21
9.1)	Using Dictionary Editor GUI . . . . .	21

9.2)	Generating the object Dictionary . . . . .	28
10 -	FAQ . . . . .	28
10.1)	General . . . . .	28
10.2)	LINUX . . . . .	29
10.3)	Win32 . . . . .	29
10.4)	HCS12 . . . . .	30
11 -	Documentation resources . . . . .	33
12 -	About the project . . . . .	35
12.1)	Contributors . . . . .	35
12.2)	Getting support . . . . .	36
12.3)	Contributing . . . . .	36
12.4)	License . . . . .	36

## 1 - Introduction

CanFestival is an OpenSource (LGPL and GPL) CANOpen framework.

### 1.1) The CanFestival project

This project, initiated by Edouard TISSERANT in 2001, as grown thanks to Francis DUPIN and other contributors.

Today, CanFestival focuses on providing an ANSI-C platform independent CANOpen stack that can be implemented as master or slave nodes on PCs, Real-time IPCs, and Microcontrollers.

CanFestival is a project supported by Lolitech.

### 1.2) What is CANopen

CANopen is a CAN based high level protocol. It defines some protocols to :

1. Configure a CAN network.
2. Transmit data to a specific node or in broadcast.
3. Administrate the network. For example detecting a not responding node.

The documentation can be found in the Can in automation website :

<http://www.can-cia.de/canopen>

The most important document about CANopen is the normative CiA Draft Standard 301, version 4.02. You can now download with no cost the specification in Can in automation website.

To continue reading this document, let us assume that you have read some papers introducing CANopen.

## **2 - CanFestival Features**

### **2.1) Tools**

The CANopen library is coming with some tools :

1. Object Dictionary editor GUI. WxPython Model-View-Controller based GUI, that help a lot in generating object dictionary source code for each node.
2. A configure script, that let you chose compile time options such as target CPU/HOST, CAN and TIMER drivers.  
This script have not been generated with autoconf, it have been made keeping micro-controller target in mind.

### **2.2) Standard conformance**

#### **a) Multi-Platform**

1. Library source code is C-ANSI.
2. Driver and examples coding conventions merely depend on target specific contributor/compiler.
3. Unix compatible interfaces and examples should compile and run on any Unix system (tested on GNU/Linux and GNU/FreeBSD).

#### **b) CanOpen conformance DS-301**

1. Should conform to DS301. V.4.02 13 february 2002.
2. Master and Slave functionality implemented.
3. Sending SYNC implemented.
4. 1 SDO server per node. (update: more than one possible. To be more tested)

5. Unlimited SDO client.
6. SDO transmission mode : normal, expedited download and upload.
7. Unlimited PDO receive.
8. Unlimited PDO transmit.
9. Object Data type implemented : 8, 16, 32 bits values, and fixed length strings.
10. Slave state full implemented.
11. NMT to change slave's state implemented.
12. PDO transmission mode : on request, every reception of 0 to n SYNC, on event.
13. NMT Heartbeat implemented : A node can be either heartbeat producer or receiver.
14. NMT NodeGuard implemented : Not fully implemented.
15. TIME (time Stamp) : Not implemented.
16. EMCY (emergency objects) : Sending and reception of EMCY objects (without manufacturer specific error field).
17. PDO Mapping bit per bit implemented.

## **DS-302**

1. Concise DFC : implemented.

## **3 - How to start**

### **3.1) Host requirements**

What you need on your development workstation.

### 3.1.1) Object Dictionary Editor GUI

1. Python, with
2. wxPython modules installed (at least version 2.6.3).
3. Gnosis xml tools. (Optional can also be installed locally to the project automatically will the help of a Makefile. Please see [9.1\) Using Dictionary Editor GUI](#) )

### 3.1.2) Linux and Unix-likes

1. Linux, FreeBSD, Cygwin or any Unix environment with GNU toolchain.
2. The GNU C compiler (`gcc`) or any other ANSI-C compiler for your target platform.
3. Xpdf, and the official 301\_v04000201.pdf file in order to get GUI context sensitive help. Download the ds301 at <http://www.can-cia.org/downloads/ciaspecifications/?1390>.
4. GNU Make
5. Bash and sed

### 3.1.3) Windows (for native win32 target)

1. Visual Studio Express 2005 or worst.
2. Microsoft platform SDK (requires Genuine Advantage)
3. Cygwin (for configuration only)

## 3.2) How to get CanFestival

Please always use CVS, this is the best way to get the most reactive support from the developer community :

```
cvs -d:pserver:anonymous@lolitech.dyndns.org:/canfestival login  
(type return, without entering a password)
```

Then, enter :

```
cvs -z3 -d:pserver:anonymous@lolitech.dyndns.org:/canfestival co -P CanFestival-  
3
```

## 4 - Understanding Canfestival

### 4.1) CanFestival Project tree layout


Simplified directory structure.

```
./src ANSI-C source of CANOpen stack
/include Exportables Header files
./drivers Interfaces to specific platforms/HW
./drivers/unix Linux and Cygwin OS interface
./drivers/win32 Native Win32 OS interface
./drivers/timers_xeno Xenomai timers/threads (Linux only)
./drivers/timers_kernel Linux kernel timer/threads
./drivers/timers_unix Posix timers/threads (Linux, Cygwin)
./drivers/can_virtual_kernel Fake CAN network (kernel space)
./drivers/can_peak_linux PeakSystem CAN library interface
./drivers/can_peak_win32 PeakSystem PCAN-Light interface
./drivers/can_uvccm_win32 Acacetus's RS232 "CAN-uVCCM" interface
./drivers/can_virtual Fake CAN network (Linux, Cygwin)
./drivers/hcs12 HCS12 full target interface
./examples Examples
./examples/TestMasterSlave 2 nodes, NMT SYNC SDO PDO, win32+unix
./examples/TestMasterMicroMod 1 node, control Peak I/O Module,
unix
./examples/gene_SYNC_HCS12 Just send periodic SYNC on HCS12
./examples/win32test Ask some DS301 infos to a node (win32)
./objdictgen Object Dictionary editor GUI
./objdictgen/config Pre-defined OD profiles
./objdictgen/examples Some examples/test OD
./doc Project and CanOpen doc
```



### 4.2) Implement CanFestival in your application

#### Implementation overview

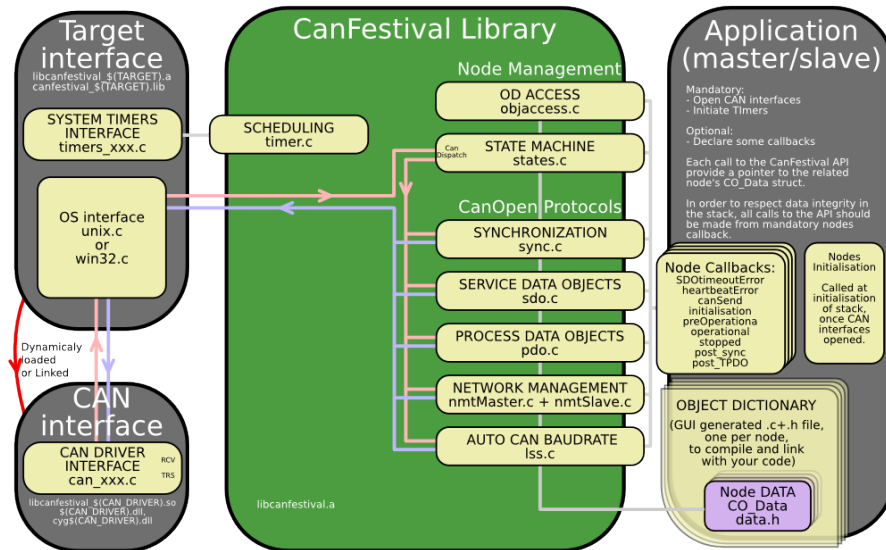


### 4.3) CanFestival CAN interfaces


Because most CAN controllers and drivers implement FIFOs, CanFestival consider sending message as a non blocking operation.

In order to prevent reentrant calls to the stack, messages reception is implemented differently on  $\mu$ C and OS.:

1.  $\mu$ C must provide interruption masking for timer and can receive IT

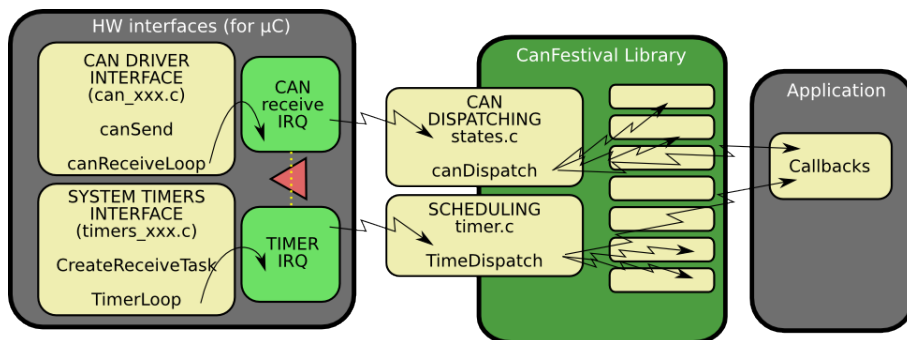

- OS must provide a receive thread, a timer thread and a mutex. CAN reception is a blocking operation.

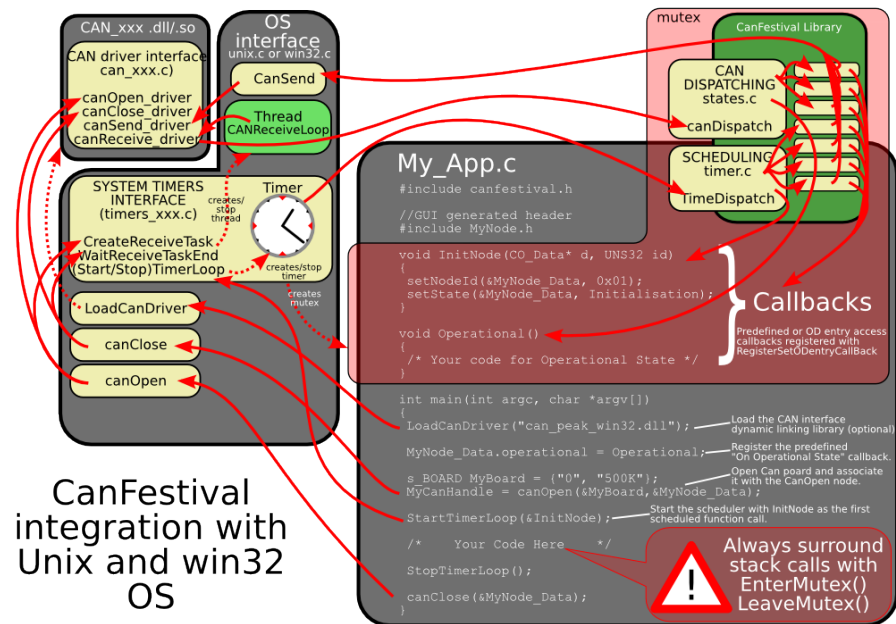


#### 4.4) CanFestival events scheduling

A CanOpen node must be able to take delayed actions.

As examples, periodic sync emission, heartbeat production or SDO time-out need to set some alarms that will be called later and do the job.


$\mu$ C generally do not have enough free timers to handle all the CanOpen needs directly. Moreover, CanFestival internal data may be corrupted by reentrant calls.

CanFestival implement a micro-scheduler (timer.c). It uses only one timer to mimic many timers. It manage an alarm table, and call alarms at desired time.

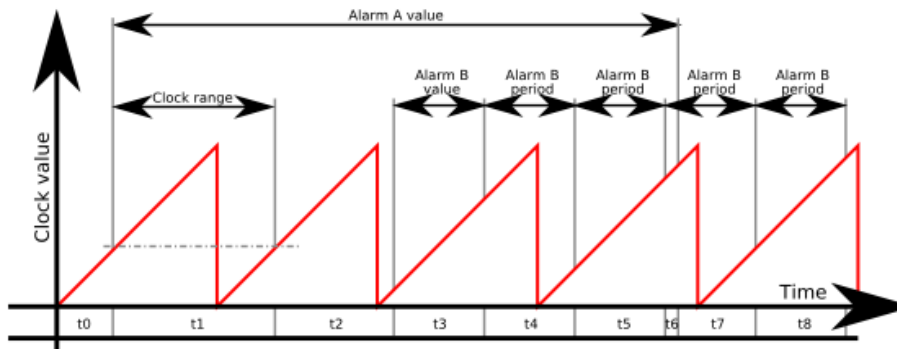

Scheduler can handle short clock value ranges limitation found on some  $\mu$ C. As an example, value range for a 16bit clock counter with  $4\mu$ s tick is crossed within 0.26 seconds... Long alarms must be segmented.

Chronogram illustrate a long alarm (A) and a short periodic alarm (B), with a  $A \text{ value} > \text{clock range} > B \text{ value}$ . Values  $t_0 \dots t_8$  are successive `setTimer` call parameter values.  $t_1$  illustrates an intermediate call to `TimeDispatch`, caused by a delay longer than clock range. Because of long alarm segmentation, at the end of  $t_1$ , `TimeDispatch` call will not trig any alarm callback.

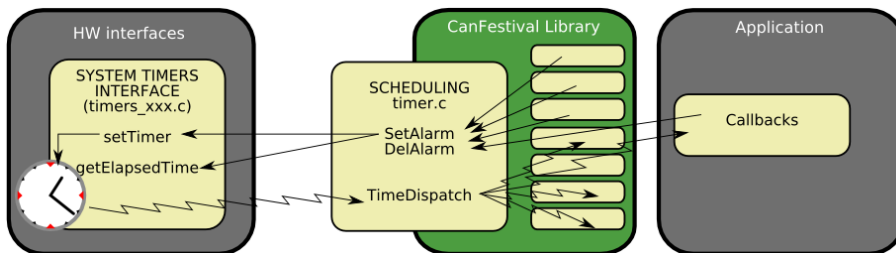

## 5 - Linux Target

Linux target is default configure target.

### 5.1) Linux Compilation and installation

Call `./configure -help` to see all available compile time options.

After invoking `./configure` with your platform specific switches, just type `make`.

```
./configure [options]
make
make install
```

### 5.1.1) Standard Linux node

Configure switch:

```
--timers=unix
```

To do a CANopen node running on PC-Linux, you need :

1. A working linux distribution
2. One or more Peak system PC CAN interface and the last Peak Linux driver installed.

### 5.1.2) Real-Time Linux node

Configure switch:

```
--timers=xeno
```

To do a CANopen node running on PC-Linux, you need :

1. A working Linux distribution patched with XENOMAI 2.1 or greater.
2. One or more Peak system PC CAN interface and the last Peak Real Time Linux driver installed.

### 5.1.3) Linux kernel node

To do a CANopen node running on PC-Linux in kernel space, you need:

- a) **A working Linux distribution with pre-built 2.6.x.x kernel sources**
- b) **A CAN card driver compatible with CanFestival**

### 5.1.4) CAN devices

Curently supported CAN devices and corresponding configure switch:

a) **Peak systems** Configure switch:

```
--can=peak_linux
```

PeakSystems CAN interface is automatically chosen as default CAN interface if libpcan is present in the system.

Please download driver at <http://www.peak-system.com/linux> and follow instructions in order to install driver on your system.

b) **Socket-Can (<http://socketcan.berlios.de>)** Configure switch:

```
--can=socket
```

c) **LinCan** Configure switch:

```
--can=lincan
```

d) **Virtual CAN interfaces (for test/debug)** Configure switch:

```
--can=virtual (in user space)
```

```
--can=virtual_kernel (in kernel space)
```

Virtual CAN interface use Unix pipes to emulate a virtual CAN network. Each message issued from a node is repeat to all other nodes. Currently only works with nodes running in the same process, and does not support work with Xenomai.

## 5.2) Testing your CanFestival installation

Sample provided in /example/TestMasterSlave is installed into your system during installation.

**TestMasterSlave**

Default can driver library is libcanfestival\_can\_virtual.so., which will simply pass CAN messages through Unix pipes between Master and Slave.

You may also want to specify different can interface and define some CAN ports. An other example using Peak's dual PCMCIA (configure and install with `-can=peak`) :

```
TestMasterSlave -l libcanfestival_can_peak.so -s 40 -m 41
```

**example/kerneltest** It's based on TestMasterSlave example and has the same functionality. Uses virtual can driver as default too. After successful installation you can insert the module by typing: `modprobe canf_ktest` Module control is done by simple console 'canf\_ktest\_console' which is used to start/stop sending data.

## 6 - Windows Targets

CanFestival can be compiled and run on Windows platform. It is possible to use both Cygwin and win32 native runtime environment.

### 6.1) Object Dictionary Editor GUI installation.

Please refer to [8.2.1\)Using Dictionary Editor GUI](#)

## 6.2) CYGWIN

### 6.2.1) Requirements

Cygwin have to be installed with those packages :

1. gcc
2. unzip
3. wget
4. make

Currently, the only supported CAN devices are PeakSystems ones, with PcanLight driver and library.

Please download driver at [http://www.peak-system.com/themen/download\\_gb.html](http://www.peak-system.com/themen/download_gb.html) and follow instructions in order to install driver on your system.

Install Cygwin as required, and the driver for your Peak CAN device.

Open a Cygwin terminal, and follow those instructions:

### 6.2.2) Cygwin configuration and compilation

#### a) A single node with PcanLight and Peak CAN-USB adapter

Download the PCAN-Light Zip file for your HW ( URL from download page ):

```
wget http://www.peak-system.com/files/usb.zip
```

Extract its content into your cygwin home (it will create a "Disk" directory):

```
unzip usb.zip
```

Configure CanFestival3 providing path to the desired PcanLight implementation:

```
cd CanFestival-3
export PCAN_INCLUDE=~/.Disk/PCAN-Light/Api/
export PCAN_HEADER=Pcan_usb.h
export PCAN_LIB=~/.Disk/PCAN-Light/Lib/Visual\ C++/Pcan_usb.lib
./configure --can=peak_win32
make
```

In order to test, you have to use another CanFestival node, connect with a CAN cable.

```
cp ~/.Disk/PCAN-Light/Pcan_usb.dll .
./examples/TestMasterSlave/TestMasterSlave \
-l drivers/can_peak_win32/cygcant_peak_win32.dll \
```

```
-S 500K -M none
```

Then, on the other node :

```
./TestMasterSlave -l my_driver.so -S none -M 500K
```

Now messages are being exchanged between master and slave node.

## b) Two nodes with PcanLight and Peak dual PCMCIA-CAN adapter

Download the PCAN-Light Zip file for your HW ( URL from download page ):

```
wget http://www.peak-system.com/files/pccard.zip
```

Extract its content into your cygwin home (it will create a “Disk” directory):

```
unzip pccard.zip
```

The configure CanFestival3 providing path to the desired PcanLight implementation:

```
export PCAN_INCLUDE=~/.Disk/PCAN-Light/Api/
export PCAN_HEADER=Pcan_pcc.h
export PCAN_LIB=~/.Disk/PCAN-Light/Lib/Visual\ C++/Pcan_pcc.lib
export PCAN2_HEADER=Pcan_2pcc.
export PCAN2_LIB=~/.Disk/PCAN-Light/Lib/Visual\ C++/Pcan_2pcc.lib
```

In order to test, just connect together both CAN ports of the PCMCIA card. Don't forget 120ohms terminator.

```
cp ~/.Disk/PCAN-Light/Pcan_pcc.dll .
cp ~/.Disk/PCAN-Light/Pcan_2pcc.dll .
./examples/TestMasterSlave/TestMasterSlave \
-l drivers/can_peak_win32/cygcan_peak_win32.dll
```

Messages are then exchanged between master and slave node, both inside TestMasterSlave's process.

## 6.3) Visual Studio C++

### 6.3.1) Requirements

Minimal Cygwin installation is required at configuration time in order to create specific header files (config.h and cancfg.h). Once this files created, cygwin is not necessary any more.

Project and solution files have been created and tested with Visual Studio Express 2005. Be sure to have installed Microsoft Platform SDK, as recommended at the end of Visual Studio installation.

### 6.3.2) Configuration with cygwin

Follow instructions given at [Cygwin configuration and compilation](#), but do neither call make nor do tests, just do configuration steps. This will create headers files accordingly to your configuration parameters, and the desired CAN hardware.

### 6.3.3) Compilation with Visual Studio

You can either load independents “\*.vcproj” project files along your own projects in your own solution or load the provided “CanFestival-3.vc8.sln” solution files directly.

Build CanFestival-3 project first.

a) **PcanLight and the can\_peak\_win32 project.** Chosen Pcan\_xxx.lib and eventually Pcan\_2xxx.lib files must be added to can\_peak\_win32 project before build of the DLL.

### 6.3.4) Testing

Copy eventually needed dlls (ie : Pcan\_Nxxx.lib) into Release or Debug directory, and run the test program:

```
TestMasterSlave.exe -l can_peak_win32.dll
```

## 6.4) MSYS

### 6.4.1) Requirements

Download from : [http://sourceforge.net/project/showfiles.php?group\\_id=2435](http://sourceforge.net/project/showfiles.php?group_id=2435)

1. MSYS-1.0.10.exe
2. MinGW-5.1.3.exe
3. mingwPORT (which contains wget-1.9.1)

Please download driver at [http://www.peak-system.com/themen/download\\_gb.html](http://www.peak-system.com/themen/download_gb.html) and follow instructions in order to install driver on your system. Install MSYS and MingW as required, and the driver for your Peak CAN device. Open a MSYS terminal, and follow those instructions:

```
- extract wget-1.9.1-mingwPORT.tar.bz2
```



- copy wget.exe in c:\msys\1.0\bin\
- start MSYS and check the file /etc/fstab contain the line c:/MinGW /mingw

#### 6.4.2) MSYS configuration and compilation

Instructions for compilation are nearly the same as CYGWIN part.

##### a) A single node with PcanLight and Peak CAN-USB adapter

Download the PCAN-Light Zip file for your HW ( URL from download page ):

```
wget http://www.peak-system.com/files/usb.zip
```

Extract its content into your MSYS's home (it will create a "Disk" directory):

```
unzip usb.zip
```

Configure CanFestival3 providing path to the desired PcanLight implementation:

```
cd CanFestival-3
export PCAN_INCLUDE=~ /Disk/PCAN-Light/Api/
export PCAN_HEADER=Pcan_usb.h
export PCAN_LIB=~ /Disk/PCAN-Light/Lib/Visual\ C++/Pcan_usb.lib
./configure --can=peak_win32
make
```

In order to test, you have to use another CanFestival node, connect with a CAN cable.

```
cp ~/Disk/PCAN-Light/Pcan_usb.dll .
./examples/TestMasterSlave/TestMasterSlave \
-l drivers/can_peak_win32/cygcan_peak_win32.dll \
-S 500K -M none
```

Then, on the other node :

```
./TestMasterSlave -l my_driver.so -S none -M 500K -m 0
```

Now messages are being exchanged between master and slave node.

##### b) Two nodes with PcanLight and Peak dual PCMCIA-CAN adapter

Download the PCAN-Light Zip file for your HW ( URL from download page ):

```
wget http://www.peak-system.com/files/pccard.zip
```

Extract its content into your MSYS's home (it will create a "Disk" directory):

```
unzip pccard.zip
```

The configure CanFestival3 providing path to the desired PcanLight implementation:

```
export PCAN_INCLUDE=~/.Disk/PCAN-Light/Api/
export PCAN_HEADER=Pcan_pcc.h
export PCAN_LIB=~/.Disk/PCAN-Light/Lib/Visual\ C++/Pcan_pcc.lib
export PCAN2_HEADER=Pcan_2pcc.h
export PCAN2_LIB=~/.Disk/PCAN-Light/Lib/Visual\ C++/Pcan_2pcc.lib
```

In order to test, just connect together both CAN ports of the PCMCIA card. Don't forget 120ohms terminator.

```
cp~/.Disk/PCAN-Light/Pcan_pcc.dll .
cp ~/.Disk/PCAN-Light/Pcan_2pcc.dll .
./examples/TestMasterSlave/TestMasterSlave \
-l drivers/can_peak_win32/cygcant_peak_win32.dll -m 0 -s 1
```

Messages are then exchanged between master and slave node, both inside TestMasterSlave's process.

## 7 - Motorola HCS12

The examples have been tested on a MC9S12DG255 mounted on a Elektronikladen HCS12 T-board.

Beware that there are a few differences in the MSCAN module of the 68HC12 and HCS12 microcontroller. For a HC12, you must adapt the driver that we provide for the HCS12.

For the difference MSCAN HC12/HCS12, see the Motorola application note AN2011/D.

Configure switch:

```
--target=hcs12
```

To do a CANopen node running on a microcontroller Motorola MC9S12DP256, you need :

1. The compiler GNU gcc for HC11, HC12, HCS12 : m6811-elf.  
Download the **release 3.1** at : [http://m68hc11.serveftp.org/m68hc11\\_pkg\\_rpm.php](http://m68hc11.serveftp.org/m68hc11_pkg_rpm.php)

2. A board with this chip. We are using the T-board from Elektronikladen.
3. At least about 40 kBytes of program memory.
4. A tool to flash the memory. (We are using the high cost Lauterbach debugger).

## **7.1) Running a HCS12 node**

### **7.1.1) Compiling Canfestival:**

```
./configure -target=hcs12
```

### **7.1.2) Compiling and building an example**

Enter in the folder of an HCS12 example,  
make all

### **7.1.3) Flashing the memory :**

Use your preferred loader ! If you are using a debugger Lauterbach, you can load the bash file : `trace32_flash_programmer.cmm`. It loads directly the elf file.

### **7.1.4) Connecting to a serial RS232 console :**

Connect the portS(TxD0) of the HCS12 to a console configured at 19200 bauds 8N1, via a Max232 chip to adapt the electricals levels. On Linux, you can use minicom. Connecting to a console is usefull to read the messages, but not required.

### **7.1.5) Connecting to the CAN network :**

Connect the port CAN0 (pin PM0, PM1) to the network via a CAN controller. On our board, the CAN controller is a PCA82C250 chip.

### **7.1.6) starting the node :**

Press the reset of your HCS12 board.

## 8 - Example and test program:

The “examples” directory contains some test program you can use as example for your own developments.

### 8.1) TestMasterSlave

```
*****
* TestMasterSlave *
* *
* A simple example for PC. It does implement 2 CanOpen *
* nodes in the same process. A master and a slave. Both *
* communicate together, exchanging periodically NMT, SYNC, *
* SDO and PDO. Master configure heartbeat producer time *
* at 1000 ms for slave node-id 0x02 by concise DCF. *
* *
* Usage: *
* ./TestMasterSlave [OPTIONS] *
* *
* OPTIONS: *
* -l : Can library ["libcanfestival_can_virtual.so"] *
* *
* Slave: *
* -s : bus name ["0"] *
* -S : 1M,500K,250K,125K,100K,50K,20K,10K,none(disable) *
* *
* Master: *
* -m : bus name ["1"] *
* -M : 1M,500K,250K,125K,100K,50K,20K,10K,none(disable) *
* *
*****
```

Notes for Concise DCF :

In this example, Master configure heartbeat producer time at 1000 ms for slave node-id 0x02 by concise DCF according DS-302 profile.

Index 0x1F22 , sub-index 0x00 of the master OD, correspond to the number of entries. This equal to the maximum possible nodeId (127). Each sub-index points to the Node-ID of the device, to which the configuration belongs.

To add more parameters configurations to the slave, the value at sub-index 0x02 must be a binary stream (little-endian) following this structure :

```

{ (UNS32) nb of entries
(UNS16) index parameter 1
(UNS8) sub-index parameter 1
(UNS32) size data parameter 1
(DOMAIN) data parameter 1
(UNS16) index parameter 2
(UNS8) sub-index parameter 2
(UNS32) size data parameter 2
(DOMAIN) data parameter 2
....
(UNS16) index parameter n
(UNS8) sub-index parameter n
(UNS32) size data parameter n
(DOMAIN) data parameter n
}

```

So the binary value stream to configure heartbeat producer time must be :  
0100000017100002000000e803

The slave node is configured just before the Master entering in Pre\_operational state.

## 8.2) **gene\_SYNC\_HCS12 :**

This is a simple CanOpen node that only send cyclic SYNC message. It demonstrate implementation on HCS12 based board.

## 8.3) **kerneltest :**

Example based on TestMasterSlave slightly modified to suit kernel space requisites. It will do the same as TestMasterSlave but in kernel space sending kernel messages (displayed by dmesg for example). It is designed as external kernel module implemented as character device. There is a shell script called 'insert.sh', which will insert the module and create a new device file /dev/canf\_ktest (used to sending commands to module). To actual sending commands you can use simple console named 'canf\_ktest\_console'. The module is dependent on a another separate module 'canfestival.ko' implementing CanOpen stack which exports requisite functions. Canfestival.ko module is then dependent on CAN card driver module, by default CAN virtual driver will be loaded. After installing modules (make install), all dependencies are solved automatically by kernel. To run the example type:

sh run.sh It will insert required modules, start console, and after quitting console it'll remove modules from kernel.

## 8.4) TestMasterMicroMod

```
*****
* TestMasterMicroMod *
* *
* A simple example for PC. *
* A CanOpen master that control a MicroMod module: *
* - setup module TPDO 1 transmit type *
* - setup module RPDO 1 transmit type *
* - setup module hearbeatbeat period *
* - disable others TPDOs *
* - set state to operational *
* - send periodic SYNC *
* - send periodic RPDO 1 to Micromod (digital output) *
* - listen Micromod's TPDO 1 (digital input) *
* - Mapping RPDO 1 bit per bit (digital input) *
* *
* Usage: *
* ./TestMasterMicroMod [OPTIONS] *
* *
* OPTIONS: *
* -l : Can library ["libcanfestival_can_virtual.so"] *
* *
* Slave: *
* -i : Slave Node id format [0x01 , 0x7F] *
* *
* Master: *
* -m : bus name ["1"] *
* -M : 1M,500K,250K,125K,100K,50K,20K,10K *
* *
*****
```

## 9 - Developing a new node

Using provided examples as a base for your new node is generally a good idea. You can also use the provided \*.od files as a base for your node object dictionary.

Creating a new CanOpen node implies to define the Object Dictionary of this node. For that, developer have to provide a C file. This C file contains the definition of all dictionary entries, and some kind of index table that helps the stack to access some entries directly.

## 9.1) Using Dictionary Editor GUI

The Object Dictionary Editor is a WxPython based GUI that is used to create the C file needed to create a new CanOpen node.

### 9.1.1) Installation and usage on Linux

You first have to download and install Gnosis XML modules. This is automated by a Makefile rule.

```
cd objdictgen
make
Now start the editor.
python objdictedit.py [od files...]
```

### 9.1.2) Installation and usage on Windows

Install Python (at least version 2.4) and wxPython (at least version 2.6.3.2).

Cygwin users can install Gnosis XML utils the same as Linux use. Just call make.

```
cd objdictgen
make
Others will have to download and intall Gnosis XML by hand :
Gnosis Utils:
http://freshmeat.net/projects/gnosisxml/
http://www.gnosis.cx/download/Gnosis\_Utils.More/Gnosis\_Utils-1.2.1.win32-py24.exe
Get latest version.
```

Download CanFestival archive and uncompress it. Use windows file explorer to go into CanFestival3\objdicgten, and double-click on objdictedit.py.



### 9.1.3) About

The Object Dictionary editor GUI is a python application that use the Model-View-Controller design pattern. It depends on WxPython to display view on any supported platform.




#### 9.1.4) Main view

Top list let you choose dictionary section, bottom left list is the selected index in that dictionary, and bottom right list are edited sub-indexes.

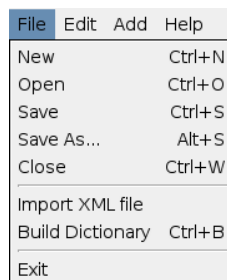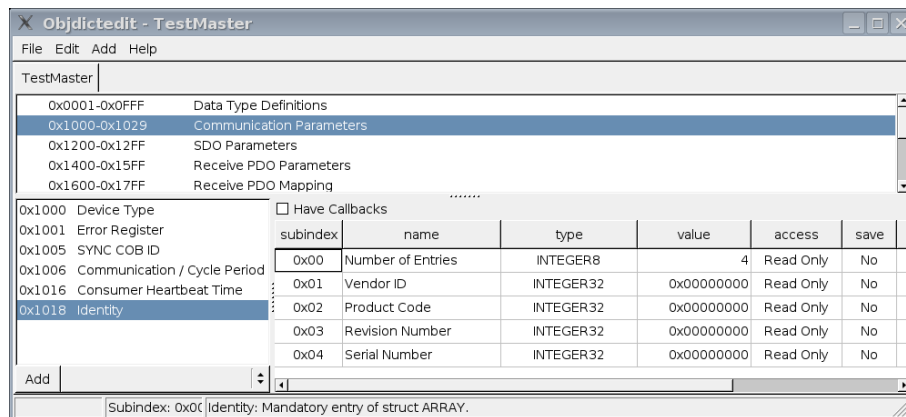



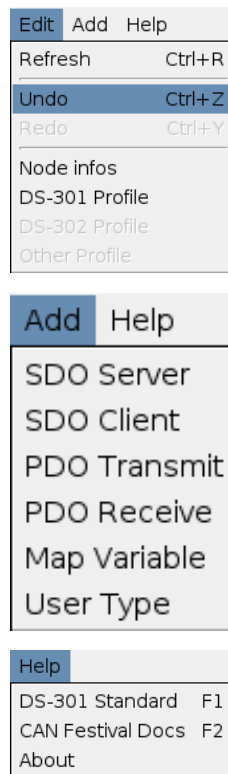

### 9.1.5) New node

Edit your node name, ID and type. Choose your inherited specific profile.


The screenshot shows the 'Create a new Node' dialog box with the following fields and options:

- Name :** Text input field containing 'MyNode'.
- Node ID :** Text input field containing '3'.
- Type :** Dropdown menu showing 'master'.
- Profile :** Dropdown menu showing 'DS-401'.
- Network :** Radio button options:
  - None
  - Node Guarding
  - Heartbeat
- Options :** Checkboxes:
  - DS-302 Profile
  - Generate SYNC
  - Emergency support
  - Save Configuration
  - Store EDS

At the bottom, there are two buttons: 'Annuler' (with a red X icon) and 'Valider' (with a green checkmark icon).

### 9.1.6) Node info


Edit your node name, ID and type.

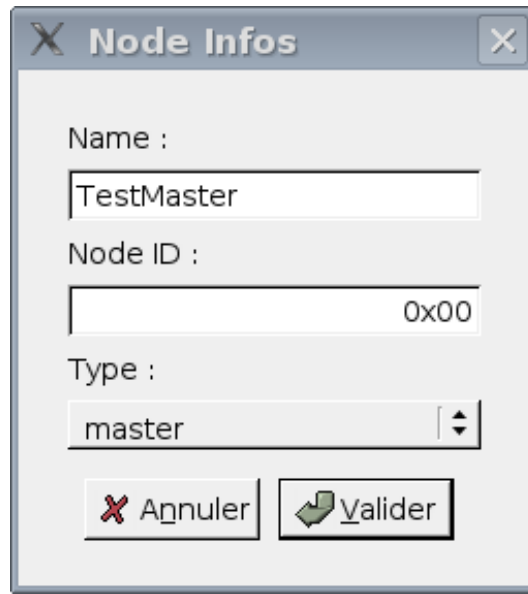

The image shows a dialog box titled "Node Infos" with a close button in the top right corner. It contains three input fields: "Name" with the text "TestMaster", "Node ID" with the text "0x00", and "Type" with a dropdown menu showing "master". At the bottom, there are two buttons: "Annuler" (with a red X icon) and "Valider" (with a green checkmark icon).

### 9.1.7) Profile editor


Chose the used profile to edit.

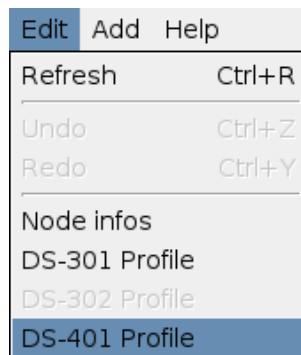

The image shows a menu with the following items:


Edit	Add	Help
Refresh		Ctrl+R
Undo		Ctrl+Z
Redo		Ctrl+Y
Node infos		
DS-301 Profile		
DS-302 Profile		
DS-401 Profile		

Pick up optional chosen profile entries.

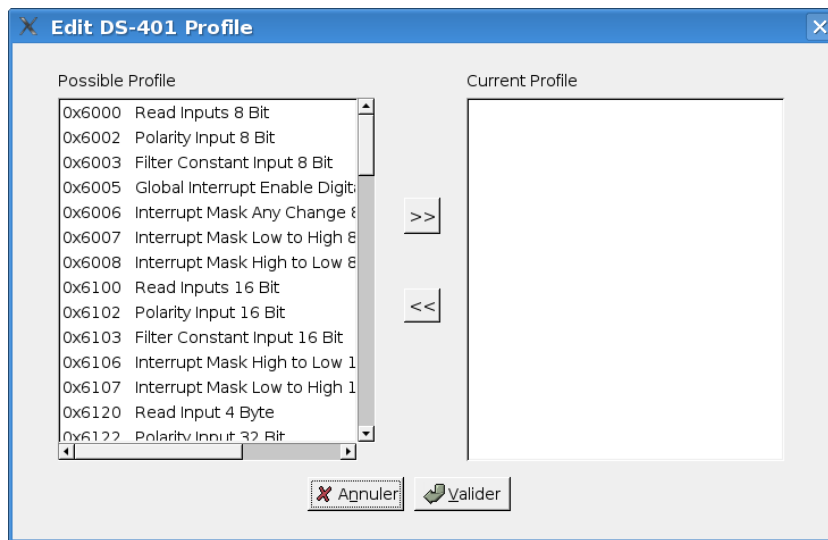


### 9.1.8) User types

Use User Types to implement value boundaries, and string length

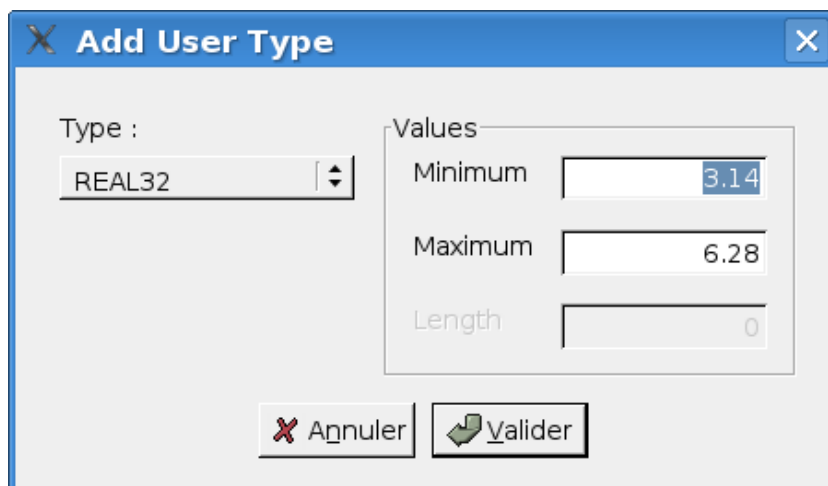


### 9.1.9) Mapped variable

Add your own specific dictionary entries and associated mapped variables.

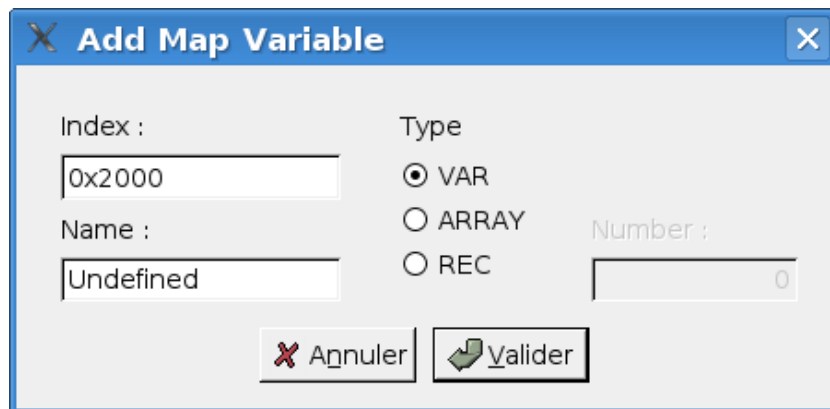


### 9.1.10) Integrated help

Using F1 key, you can get context sensitive help.

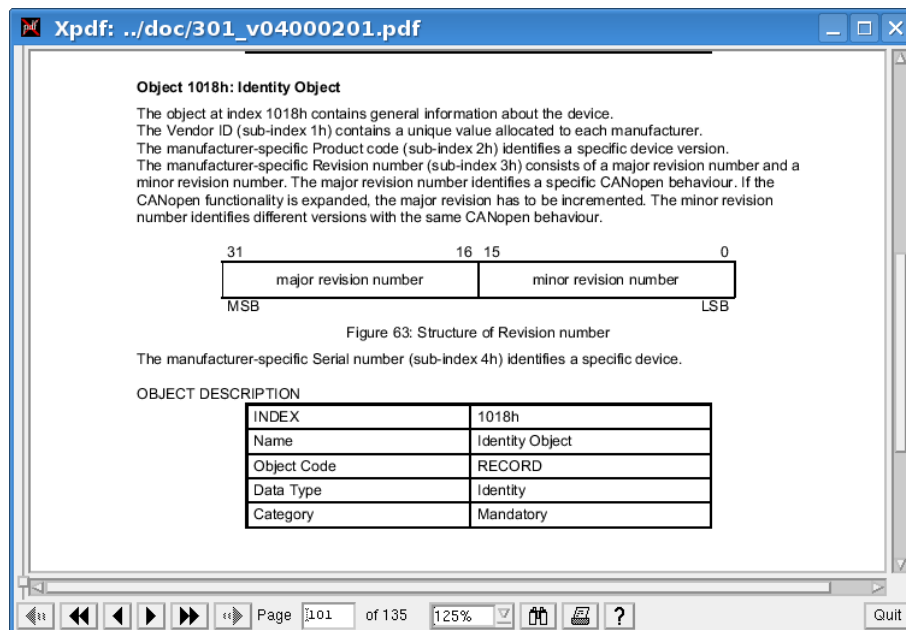

In order to do that, official 301\_v04000201.pdf file must be placed into doc/ directory, and xpdf must be present on your system.

F2 key open HTML CanFestival help.

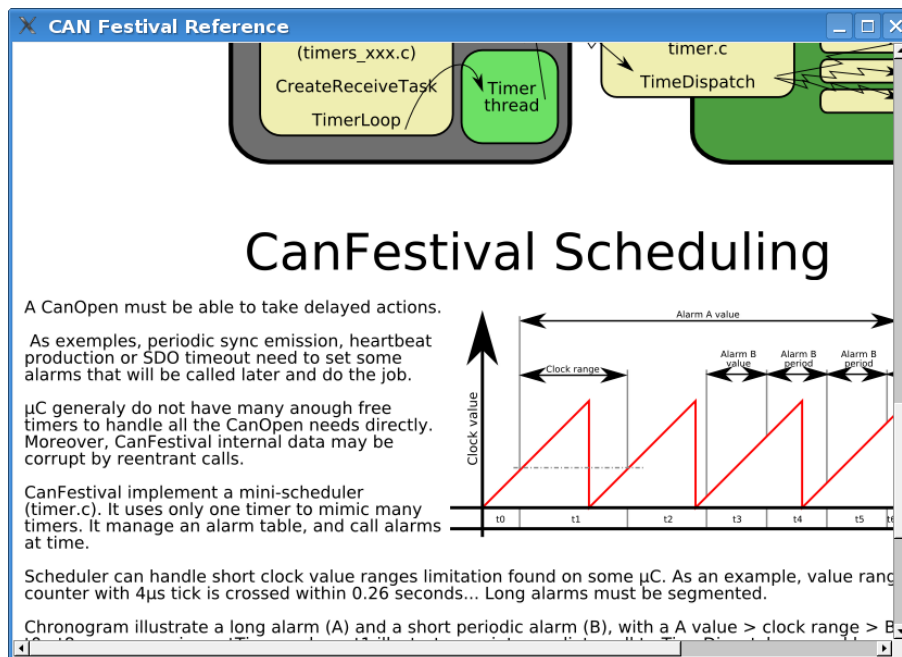


## 9.2) Generating the object Dictionary

Once object dictionary has been edited and saved, you have to generate object dictionary C code for your CanFestival node.

### 9.2.1) With GUI

Menu entry "File/Build Dictionary".

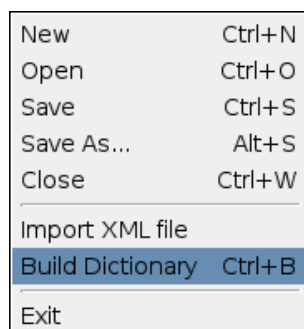

Choose C file to create or overwrite. Header file will be also created with the same prefix as C file.

### 9.2.2) With command line

Usage of `objdictgen.py` :

```
python objdictgen.py XMLFilePath CfilePath
```

## 10 - FAQ

### 10.1) General

#### 10.1.1) Does the code compiles on Windows ?

Yes, with both Cygwin and Visual Studio C++.

Because CANopen layer is coded with C, put a compilation option `/TC` or `/TP` if you plan to mix C++ files. See the MSDN documentation about that.

#### 10.1.2) How to fit the library to an other microcontrôler ?

First, be sure that you have at least 40K bytes of program memory, and about 2k of RAM.

You have to create target specific interface to HW resources. Take model on bundled interfaces provided in `drivers/` and create your own interface. You also have to update `Makefile.in` files for target specific `cflags` and options. Chose `-targer=` configure switch to compile your specific interface.

You are welcome to contribute-back your own interfaces ! Other Canfestival users will use it and provide feedback, tests and enhancements.

#### 10.1.3) Is CanFestival3 conform to DS301 v.4.02 ?

Thanks to Philippe Foureys (IUT of Valence), a slave node have been tested with the National Instrument CanOpen Conformance Test. It passed the test with success.

Some very small unconformity have been found in very unusual situations, for example in the SDO code response to wrong messages.

### 10.2) LINUX

#### 10.2.1) How to use a Peaksystem CAN board ?

Just install peak driver and then compile and install Canfestival. Peak driver is detected at compile time.

### 10.2.2) How to use an unsupported CAN board ?

You have to install the specific driver on your system, with necessary libs and headers.

Use `can_peak.c/h` or `can_virtual.c/h` as an example, and adapt it to your driver API.

Execute configure script and choose `--can=mydriver`

## 10.3) Win32

Compatibility:

1. Code was compiled MS VisualStudio 2003.NET and VisualStudio 2005.NET for WindowsXP with ANSI and UNICODE configurations and for WindowsCE 5.0.
2. Some preliminary testing was done, but not enough to be used in mission critical projects.

Additional Features:

1. Non-integral integers support implementation UNS24, UNS40, UNS48 etc.
2. When enable debug output with `DEBUG_WAR_CONSOLE_ON` or `DEBUG_ERR_CONSOLE_ON`, you can navigate in CanFestival source code by double clicking at diagnostic lines in VisualStudio.NET 200X Debug Output Window.

Custom size integral types such as `INTEGER24`, `UNS40`, `INTEGER56` etc. have been defined as 64 bits integers. You will need to replace `sizeof(TYPE)` operators to `sizeof_TYPE` definitions in generated code, i.e. replace `sizeof(UNS40)` with `sizeof_UN40`.

## 10.4) HCS12

### 10.4.1) Which board are you using ?

A T-board from elektronikladen with a MC9S12DP256 or MC9S12DG256.

#### 10.4.2) Does the code compile with an other compiler than GNU gcc ?

It is known to work with Metrowerks CodeWarrior. Here are some tips from Philippe Foureys. :

##### a) Interrupt functions

```

i) Code for GCC: // prototype
void __attribute__((interrupt))timer3Hdl(void):
// function
void __attribute__((interrupt))timer3Hdl(void){...}

```

```

ii) Code for CodeWarrior // protoype
void interrupt timer3Hdl(void);
// function
#pragma CODE_SEG __NEAR_SEG_NON_BANKED
void interrupt timer3Hdl(void)
{...}
#pragma CODE_SEG_DEFAULT

```

##### b) Interrupt lock, unlock

```

i) Code for GCC void unlock (void)
{
__asm__ __volatile__("cli");
}
void lock (void)
{
unsigned short mask;
__asm__ __volatile__("tpa\n\tsei":"=d"(mask));
}

```

```

ii) Code for CodeWarrior void unlock (void)
{
__asm("cli");
}
void lock (void)
{
unsigned short mask;

```



```

__asm
{
tpa:tsei:="d"(mask);
}
}

```

### c) Initialize function

```

i) Code for GCC void initCanHCS12 (void)
{
//Init the HCS12 microcontroler for CanOpen
initHCS12();
// Init the HCS12 CAN driver
const canBusInit bi0 = {
0, /* no low power */
0, /* no time stamp */
1, /* enable MSCAN */
0, /* clock source : oscillator (In fact, it is not used) */
0, /* no loop back */
0, /* no listen only */
0, /* no low pass filter for wk up */
CAN_Baudrates[CAN_BAUDRATE_250K],
{
0x00, /* Filter on 16 bits.
See Motorola Block Guide V02.14 fig 4-3 */
0x00, 0xFF, /* filter 0 hight accept all msg */
0x00, 0xFF, /* filter 0 low accept all msg */
0x00, 0xFF, /* filter 1 hight filter all of msg */
0x00, 0xFF, /* filter 1 low filter all of msg */
0x00, 0xFF, /* filter 2 hight filter most of msg */
0x00, 0xFF, /* filter 2 low filter most of msg */
0x00, 0xFF, /* filter 3 hight filter most of msg */
0x00, 0xFF, /* filter 3 low filter most of msg */
}
};

```

```

ii) Code for CodeWarrior void initCanHCS12 (void)
{
//Init the HCS12 microcontroler for CanOpen
initHCS12();

```

```

// Init the HCS12 CAN driver
const canBusInit bi0 = {
0,    /* no low power          */
0,    /* no time stamp            */
1,    /* enable MSCAN            */
0,    /* clock source : oscillator (In fact, it is not used) */
0,    /* no loop back            */
0,    /* no listen only          */
0,    /* no low pass filter for wk up */
{
1, /* clksrc */
3, /* brp    */
0, /* sjw    */
0, /* samp   */
1, /* tseg2  */
12, /* tseg1 */
},
{
0x00, /* Filter on 16 bits.
See Motorola Block Guide V02.14 fig 4-3 */
0x00, 0xFF, /* filter 0 high accept all msg */
0x00, 0xFF, /* filter 0 low accept all msg */
0x00, 0xFF, /* filter 1 high filter all of msg */
0x00, 0xFF, /* filter 1 low filter all of msg */
0x00, 0xFF, /* filter 2 high filter most of msg */
0x00, 0xFF, /* filter 2 low filter most of msg */
0x00, 0xFF, /* filter 3 high filter most of msg */
0x00, 0xFF, /* filter 3 low filter most of msg */
}
};

```

#### 10.4.3) Does the code works in banked memory ?

No. Today it seems that the port of gcc is bogged for using the banked memory. So, unfortunately, we are limited to 48 Kbytes of memory code.

#### 10.4.4) What GCC version are you using ?

We are using the stable RPM release 2.2 :

1. GNU Gcc 3.0.4. Build 20030501

2. Newlib 1.10.0 Build 20030421
3. GNU Binutils 2.12.1 Build 20030427

## 11 - Documentation resources

**a) CIA : Can in Automation**

Many documentation on CANopen.

<http://www.can-cia.de>

**b) Resources and training in CANopen**

<http://www.esacademy.com>

**c) Elektronikladen HCS12 T-board**

[http://www.elektronikladen.de/en\\_hcs12tb.html](http://www.elektronikladen.de/en_hcs12tb.html)

**d) Gnu gcc compiler for HC12**

[http://m68hc11.serveftp.org/m68hc11\\_port.php](http://m68hc11.serveftp.org/m68hc11_port.php)

**e) Motorola documentation on HC12**

[http://www.freescale.com/webapp/sps/site/prod\\_summary.jsp?code=MC9S12DP256](http://www.freescale.com/webapp/sps/site/prod_summary.jsp?code=MC9S12DP256)

**f) Lauterbach debugger for HC12**

<http://www.lauterbach.com>

**g) Python language**

<http://www.python.org>

## 12 - About the project

### 12.1) Contributors



Unité mixte de recherche INRETS-LCPC  
sur les Interactions Véhicule-Infrastructure-Conducteur  
14, route de la minière  
78000 Versailles  
FRANCE  
Tel : +33 1 40 43 29 01  
<http://www.inrets.fr/ur/livic>  
**Contributors** : Francis DUPIN  
Camille BOSSARD  
Laurent ROMIEUX



LOLITECH  
204, rue du Haut du Pin  
88470 Saint-Michel sur Meurthe  
FRANCE  
Tel : +33 3 29 52 95 67  
<http://www.lolitech.fr>  
**Contributors** : Edouard TISSERANT (Original author)  
Laurent BESSARD

Many thanks to the other contributors for their great work:  
Raphael ZULLIGER  
David DUMINY (sté A6R)  
Zakaria BELAMRI

## 12.2) Getting support

Send your feedback and bug reports to [canfestival-devel@lists.sourceforge.net](mailto:canfestival-devel@lists.sourceforge.net).

For commercial support, training and specific integration and developments, please ask LOLITECH (see contributors).

## 12.3) Contributing

You are free to contribute your specific interfaces back to the project. This way, you can hope to get support from CanFestival users community.

Please send your patch to [canfestival-devel@lists.sourceforge.net](mailto:canfestival-devel@lists.sourceforge.net).

Feel free to create some new predefined DS-4xx profiles (\*.prf) in objdict-gen/config, as much as possible respectful to the official specifications.

## 12.4) License

All the project is licensed with LGPL. This mean you can link CanFestival with any code without being obliged to publish it.

```
#This file is part of CanFestival, a library implementing CanOpen Stack.
#
#Copyright (C): Edouard TISSERANT, Francis DUPIN and Laurent BESSARD
#
#See COPYING file for copyrights details.
#
#This library is free software; you can redistribute it and/or
#modify it under the terms of the GNU Lesser General Public
#License as published by the Free Software Foundation; either
#version 2.1 of the License, or (at your option) any later version.
#
#This library is distributed in the hope that it will be useful,
#but WITHOUT ANY WARRANTY; without even the implied warranty of
#MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU
#Lesser General Public License for more details.
#
#You should have received a copy of the GNU Lesser General Public
#License along with this library; if not, write to the Free Software
#Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307
USA
```